


# B-Puffroller

Technical water double puffer  
for DHW production and plant side

300/80-500/70 L

- Integrated and compact solution
- To be integrated on all kind of plants.
- Storage rapidity, abundant and continuous erogation.
- High efficiency for low exercise costs
- Absolute hygiene
- Long durability without corrosion
- Simplicity of installation
- Inside untreated.
- Polyurethane foam insulation 50 mm.
- Prepared for inserting auxiliary electric resistance
- Lower Puffer for heat or cold water,
- No inside handling. Insulation: PU-hard polyurethane 70 mm

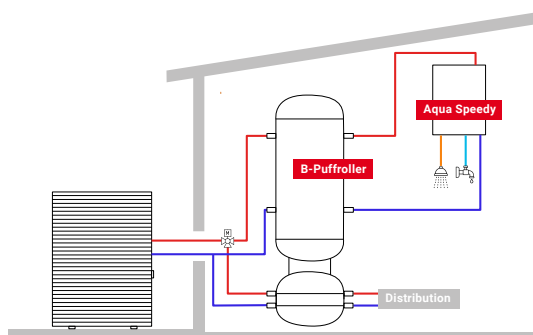

B-Puffroller		300	500
Total storage	l	363	553
Isolation thickness	mm	50	50
Total height insulation included	mm	1940	2050
Diameter isolation included	mm	600	700
Unloaded weight	kg	55	100
Heating max working pressure	bar	6	6
Boiler max working temp	°C	95	95

\* For the accessories see the Puffroller's page

Lower tank			
Thermal wheel for Heat Pump	l	80	70
Upper tank			
Connector Type		300	500
Air evacuation		1" 1/4	1" 1/4
Boiler outlet		2"	2" 1/2
Heating circuit outlet		-	2" 1/2
Boiler - heating circuit return at 50°C		2"	2" 1/2
Boiler - heating circuit return at 30°C		1/2"	1/2"
Thermometer		1/2"	1/2"
Feeler		1/2"	1/2"
Electric heater		1" 1/2	1" 1/2
Drain coil		3/4"	3/4"